


MULTI-MAX MULTI-USE LUBRICANT

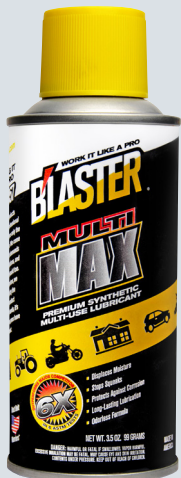

UPDATED: 5/10/2021

PART#	NET WT.	UPC	CASE QTY.
16-MM-DS*	10oz/283g	0-32167-00007-4	12
MM-TS	3.5oz/99g	0-32167-00008-1	12
Premium Synthetic Multi-Use Lubricant			

***PRO STRAW DELIVERY SYSTEM:**

With *Pro Straw Delivery System - In the down position, the conical fan spray can be used for coating large surface areas. Flip the clear feed tube up to direct a flood of product on hard to reach areas. The adjustment knob on the back of the PRO STRAW - Control Flow Technology can be positioned to allow full flow, reduced flow or no flow...That's up to you.

DESCRIPTION:

B'laster Multi-Max Lubricant is a premium, synthetic multi-use lubricant that outperforms the leading competitor in six ASTM tests. Its odorless formula provides the longest-lasting lubrication and protection against corrosion, which reduces friction and wear. Use it on thousands of applications from door hinges and window tracks to lawn and garden equipment and chains and locks.

B'LAST ON:

Hand Tools, Hinges, Door Tracks, Rollers, Gears, Winches, Cables, Pulleys, Storm Shutters, Window & Door Tracks, Bushings, Bearings, Chains, Locks, Sport & Outdoor Equipment, Snow Shovels, Lawn & Garden Equipment

DIRECTIONS FOR USE:

Shake the can well before using. It's good stuff, a little goes a long way. Spray lightly on surfaces. Wipe off any excess or drips. Repeat as necessary. It is suggested that the can be at room temperature when dispensing.

SAFETY:

DANGER! CONTENTS UNDER PRESSURE: Do not puncture or incinerate container. Do not expose to heat or store at temperatures above 120°F.

Exposure Symptoms:

Inhalation: Not normally required. If symptoms occur obtain medical attention.

Skin Contact: Not normally required. If skin irritation occurs: Get medical advice/attention.

Eye Contact: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If symptoms occur obtain medical attention.

Ingestion: Do not give anything by mouth to an unconscious person. Seek medical treatment. Do NOT induce vomiting.

TYPICAL PROPERTIES:

Flash Point: 284°F (140°C)

Density (20°C): 6.99 lbs/gal

Specific Gravity (20°C): 0.84

Boiling Point: 425°F (218°C)

Product Category:
Multi-Purpose Lubricant

Body Shop Safe: Yes

Base Type: Synthetic

Appearance: Amber

Spray Pattern: Conical (Cone-Shaped)

Odor: Typical Petroleum

Temperature Range: -35 to 200°F

VOC: < 10%

Clean-Procedures: Product can be removed with hot water and dish washing detergent. Use standard prep solvent to remove product prior to painting.