


INDUSTRIAL GRAPHITE LUBRICANT

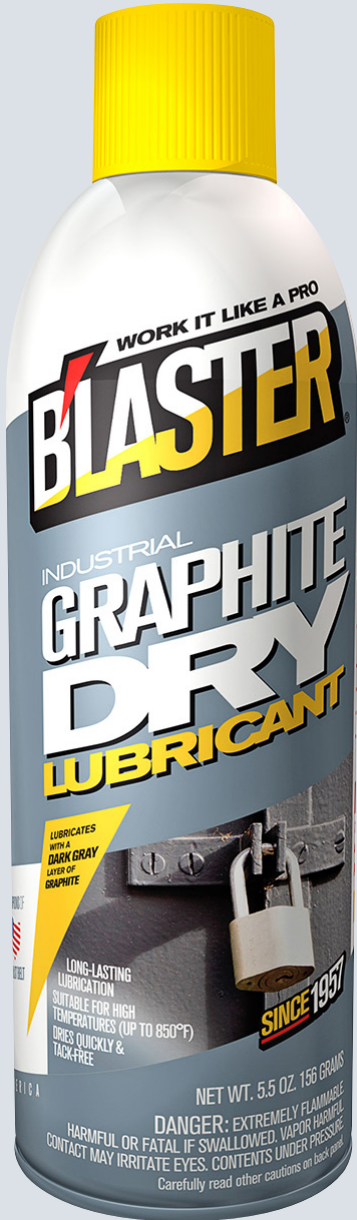

UPDATED: 5/10/2021

| PART# | NET WT. | UPC | CASE QTY. |
|---|------------|-----------------|-----------|
| 8-GS | 5.5oz/156g | 0-32167-22008-3 | 12 |
| Protects Surfaces from Extreme Pressures and Friction | | | |

DESCRIPTION:

B'laster Graphite Dry Lubricant reduces wear to extend equipment life. It creates a quick drying film that provides long-lasting lubrication. It's recommended as a general maintenance lubricant on gaskets, transfer belts and conveyor belts. Also for use for high temperature, low load, locks, rollers, wheels, gears, chains and hoists.

B'LAST ON:

Pre-assembly & Thread Lubricant (anti-seize), Gaskets, Chains, Locks, Plant Machinery & Handling Equipment, Hoists & Winches, Rollers, Bearings & Bushings, Gears, Sprocketst

DIRECTIONS FOR USE:

Shake the can well before using. Spray directly on surfaces. Don't go crazy at first. Use sparingly, you can always spray more. Wipe off excess immediately. It is suggested that the can be at room temperature when dispensing.

SAFETY:

DANGER! CONTENTS ARE FLAMMABLE: Keep spray away from heat, sparks, open flames, pilot lights, etc. Always unplug electrical tools, motors, and appliances before spraying or bringing can near any source of electricity.

Exposure Symptoms:

Inhalation: IF INHALED: Remove person to fresh air and keep comfortable for breathing. If breathing is labored, administer oxygen. Call a POISON CENTER/doctor if you feel unwell.

Skin Contact: Wash affected skin with soap and water. If skin irritation occurs, get medical advice/attention. Take off contaminated clothing and wash it before reuse.

Eye Contact: IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists, get medical advice/attention.

Ingestion: Do not give anything by mouth to an unconscious person. Seek medical treatment. Do NOT induce vomiting.

TYPICAL PROPERTIES:

Flash Point: -156°F (104°C)

Density (20°C): 5.8 lbs/gal

Specific Gravity (20°C): 0.7

Boiling Point: Not Applicable

Product Category: Multi-Purpose Dry Lubricant

Body Shop Safe: Yes

Base Type: Graphite

Appearance: Black

Spray Pattern: Conical (Cone-Shaped)

Odor: Mild Isopropanol

Temperature Range: -300 to 850°F

VOC: < 100%

Clean-Procedures: Use high flash solvent to remove product.