


PROFESSIONAL AIR TOOL LUBRICANT

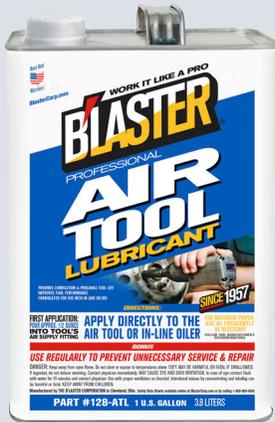

UPDATED: 5/10/2021

PART#	NET WT.	UPC	CASE QTY.
16-ATL	16 fl oz/473mL	0-32167-90022-0	12
128-ATL	1 gal/3.8L	0-32167-09022-8	4
5-ATL	5gal/18.9L	0-32167-00922-0	1
55-ATL	55gal/208L	0-32167-05522-7	1
Brief Description: Provides Lubrication and Prolongs Tool Life			

DESCRIPTION:

B'laster Air Tool Lubricant lubricates and protects internal tool parts. It ensures maximum tool performance, prevents unnecessary maintenance and also protects tool parts from high speeds and shock loads.

B'LAST ON:

Impact Wrenches, Ratchets, Deburring Tools, Chisels, Sanders and Buffers, Nailers, Polishers, Drills, Jackhammers and Pavement Breakers, Grinders, Air Motors, Most Pneumatic Equipment

DIRECTIONS FOR USE:

Follow the equipment manufacturer's recommendations.
 First Application: Pour one-half ounce into tool's air supply fitting.
 Apply directly to the air tool or in-line oiler.
 For maximum power, use prior to every air tool use.

SAFETY:

DANGER: Keep away from open flame. Do not store or expose to temperatures above 120°F.

Exposure Symptoms:

- Inhalation:** May cause respiratory tract irritation.
- Skin Contact:** May cause skin irritation. Symptoms may include redness, drying, defatting and cracking of the skin.
- Eye Contact:** May cause eye irritation. Symptoms may include discomfort or pain, excess blinking and tear production, with possible redness and swelling.
- Ingestion:** May be fatal if swallowed and enters airways. This product may be aspirated into the lungs and cause chemical pneumonitis. May cause stomach distress, nausea or vomiting.

TYPICAL PROPERTIES:

- Flash Point:** 58°F (14°C)
- Density (20°C):** 7.1 lbs/gal
- Specific Gravity (20°C):** 0.86
- Boiling Point:** 700-860°F (371.1 - 460°C)
- Product Category:** Multi-Purpose Lubricant
- Body Shop Safe:** Yes
- Base Type:** Petroleum
- Appearance:** Clear Colorless
- Spray Pattern:** N/A
- Odor:** Typical Petroleum
- Temperature Range:** 0 to 300°F
- VOC:** < 10%
- Clean-Procedures:** Product can be removed with hot water and dish washing detergent.