


ORIGINAL PB[®] PENETRATING LITHIUM GREASE

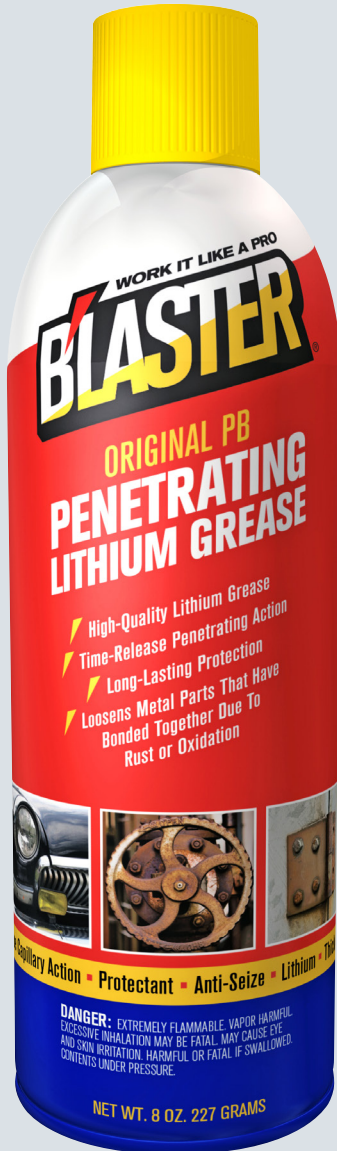

PART#	NET WT.	UPC	CASE QTY.
GR-8A-PB	8oz/227g	0-32167-77006-9	6
Lubricates, Penetrates and Protects from Rust and Corrosion			

DESCRIPTION:

A high-quality lithium grease harnessing the power of the Original PB B'laster creating a time-released penetrating action. This unique combination has the ability to penetrate existing rust and corrosion, but also stay on metal surfaces longer than conventional greases providing long-lasting lubrication and protection against rust and corrosion.

B'LAST ON:

Farm & Agriculture, landscaping, construction, automotive & recreational. It is also great for restoration and anything rusted or corroded.

DIRECTIONS FOR USE:

Shake the can well before using. Spray liberally on rusted & corroded parts or surfaces. Relax & enjoy the time-release penetrating action. Repeat as necessary. It is suggested that the can be at room temperature when dispensing.

SAFETY:

DANGER! EXTREMELY FLAMMABLE: Do not spray near sparks, heat, or open flame. Vapors will accumulate readily and may ignite explosively. Keep area ventilated during use and until all vapors are gone.

Exposure Symptoms:

Inhalation: Move person to fresh air. If breathing is labored, administer oxygen. If symptoms develop, obtain medical attention.

Skin Contact: Wash affected skin with soap and water. If symptoms develop, obtain medical attention. Take off contaminated clothing and wash it before reuse.

Eye Contact: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists, get medical advice/attention.

Ingestion: Immediately call a POISON CENTER or doctor/physician. Do not induce vomiting. Do not give anything by mouth to an unconscious person.

TYPICAL PROPERTIES:

Flash Point: -155°F (-104°C)

Density (20°C): 6.64 lbs/gal

Specific Gravity (20°C): 0.80

Boiling Point: N/A

Product Category: Multi-Purpose Lubricant

Body Shop Safe: Yes

Base Type: Lithium

Appearance: Orange

Spray Pattern: Thick Foam

Odor: Moderate Mild Petroleum

Temperature Range: -20 to 550°F

VOC: < 25%

Clean-Procedures: Start by scraping or wiping off excess product. Product can be removed with hot water and dish washing detergent. Use standard prep solvent to remove product prior to painting.

Clean-Procedures: Start by scraping or wiping off excess product. Product can be removed with hot water and dish washing detergent. Use standard prep solvent to remove product prior to painting.

Clean-Procedures: Start by scraping or wiping off excess product. Product can be removed with hot water and dish washing detergent. Use standard prep solvent to remove product prior to painting.

Clean-Procedures: Start by scraping or wiping off excess product. Product can be removed with hot water and dish washing detergent. Use standard prep solvent to remove product prior to painting.

WARNING:

This product can expose you to chemicals including Naphthalene, which is known to the State of California to cause cancer.

For more information go to www.P65Warnings.ca.gov.



UPDATED: 5/10/2021