


INDUSTRIAL STRENGTH SILICONE LUBRICANT

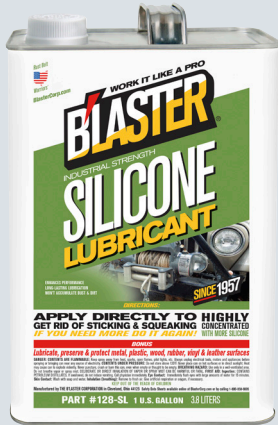

UPDATED: 4/12/2022

PART#	NET WT.	UPC	CASE QTY.
16-SL	11oz/311g	0-32167-70004-2	12
128-SL	1gal/3.8L	0-32167-07055-8	4
5-SL	5gal/18.9L	0-32167-70058-5	1
55-SL	55gal/208L	0-32167-70055-4	1
Lubricates, Protects with Silicone			

DESCRIPTION:

B'laster Silicone Lubricant contains a higher concentration of silicone than competitor brands, which provides longer-lasting lubrication. Formulated with a proprietary super-slip additive to help enhance performance. Its clear, non-evaporating formula eliminates wear from constant friction and is safe and non-staining.

B'LAST ON:

Rubber Window & Door Seals, Winches, Cables, Pulleys, Storm Shutters, Window & Door Tracks, Bushings, Bearings, Window Tracks, Chains, Sports & Outdoor Equipment, Snow Shovels, Lawn & Garden Equipment.

DIRECTIONS FOR USE:

Shake the can well before using. Spray area to get rid of sticking & squeaking. If you need more, do it again. It is suggested that the can be at room temperature when dispensing.

SAFETY:

DANGER: CONTENTS ARE FLAMMABLE: Keep spray away from heat, sparks, open flames, pilot lights, etc. Always unplug electrical tools, motors, and appliances before spraying or bringing can near any source of electricity.

Exposure Symptoms:

Inhalation: May cause drowsiness or dizziness.

Skin Contact: May cause skin irritation. Symptoms may include redness, drying, defatting and cracking of the skin.

Eye Contact: May cause eye irritation. Symptoms may include discomfort or pain, excess blinking and tear production, with possible redness and swelling.

Ingestion: May be fatal if swallowed and enters airways. This product may be aspirated into the lungs and cause chemical pneumonitis. May cause stomach distress, nausea or vomiting.

TYPICAL PROPERTIES:

Flash Point: 130°F (54°C)

Density (20°C): 6.8 lbs/gal

Specific Gravity (20°C): 0.81

Boiling Point: 360°F (182°C)

Product Category:

Silicone-Based Multi-Purpose Lubricant

Body Shop Safe: No

Base Type: Silicone

Appearance: Clear Colorless

Spray Pattern: Conical (Cone-Shaped)

Odor: Mild Aliphatic

Temperature Range: -20 to 250°F

VOC: < 60%

Clean-Procedures: Use high flash solvent to remove product.